



**CLEAN DEVELOPMENT MECHANISM  
PROJECT DESIGN DOCUMENT FORM (CDM-SSC-PDD)  
Version 03 - in effect as of: 22 December 2006**

**CONTENTS**

- A. General description of the small scale project activity
- B. Application of a baseline and monitoring methodology
- C. Duration of the project activity / crediting period
- D. Environmental impacts
- E. Stakeholders' comments

**Annexes**

- Annex 1: Contact information on participants in the proposed small scale project activity
- Annex 2: Information regarding public funding
- Annex 3: Baseline information
- Annex 4: Monitoring Information



CDM – Executive Board

## Revision history of this document

| Version Number | Date             | Description and reason of revision  |
|----------------|------------------|---|
| 01             | 21 January 2003  | Initial adoption  |
| 02             | 8 July 2005      | <ul style="list-style-type: none"> <li>! The Board agreed to revise the CDM SSC PDD to reflect guidance and clarifications provided by the Board since version 01 of this document.</li> <li>! As a consequence, the guidelines for completing CDM SSC PDD have been revised accordingly to version 2. The latest version can be found at <a href="http://cdm.unfccc.int/Reference/Documents">http://cdm.unfccc.int/Reference/Documents</a>.</li> </ul> |
| 03             | 22 December 2006 | <ul style="list-style-type: none"> <li>! The Board agreed to revise the CDM project design document for small-scale activities(CDM-SSC-PDD), taking into account CDM-PDD and CDM-NM</li> </ul>  |




---

**CDM – Executive Board**
**SECTION A. General description of small-scale project activity**
**A.1 Title of the small-scale project activity:**

&gt;&gt;

Dongliuxi Erji 12.6 MW Hydropower Project in Hubei Province

Version number of the document: 01

Date: Aug. 10<sup>th</sup>, 2007
**A.2. Description of the small-scale project activity:**

&gt;&gt;

The Dongliuxi Erji 12.6 MW Hydropower Project in Hubei Province (hereafter referred to as the Project) locates on the middle reach of Dongliuxi River within Changyang Tujia Autonomous County, Yichang City, Hubei Province, P.R.China. The Project, utilizing the water resources of the Dongliuxi River, supplies electricity without CO<sub>2</sub> emissions to Central China Power Grid (CCPG) through Hubei Power Grid (HBPG) .

The Project is a diversion-type hydropower plant with total installed capacity of 12.6 MW, reservoir volume of 624,000 m<sup>3</sup> and surface area at full reservoir water level of 0.05 km<sup>2</sup>. The Project's power density is 252 W/m<sup>2</sup>. It is estimated that the feed-in electricity to Hubei Power Grid from the Project is approximately 46084.9MWh per year. Hubei Power Grid is an integral part of CCPG. The project activity will achieve greenhouse gas (GHG) emission reductions by avoiding CO<sub>2</sub> emissions from the business-as-usual scenario, electricity generated by those fossil fuel-fired power plants connected into CCPG. The estimated annual emission reduction is 44,912 tCO<sub>2</sub>e.

The Project clearly fits into the development priority of China. It will therefore help reduce GHG emissions resulting from the high-growth, coal-dominated business-as-usual scenario. The Project will not only supply renewable electricity to grid, but also contribute to sustainable development of the local community by means of:

- w Reducing GHG emissions compared to a business-as-usual scenario;
- w Stimulating economy development of poverty area in China;
- w Reducing the emission of other pollutants resulting from the power generation industry in China, compared to a business-as-usual scenario;
- w Creating 38 permanent jobs and lots of short-term employment opportunities for local people during the project construction and operation period.

**A.3. Project participants:**

&gt;&gt;



## CDM – Executive Board

| Name of Party involved (*) ((host) indicates a host Party)  | Private and/or public entity(ies) project participants (*) (as applicable) | Kindly indicate if the Party involved wishes to be considered as project participant (Yes/No) |
|---|--|---|
| P.R.China (host)  | Changyang Jinglong Hydropower Development Co., Ltd.<br>(project owner)     | No  |
| the Netherlands   | Essent Energy Trading B.V.<br>(purchasing party)                           | No  |
| (*) In accordance with the CDM modalities and procedures, at the time of making the CDM-PDD public at the stage of validation, a Party involved may or may not have provided its approval. At the time of requesting registration, the approval by the Party(ies) involved is required. |  |   |

**A.4. Technical description of the small-scale project activity:**
**A.4.1. Location of the small-scale project activity:**

&gt;&gt;

**A.4.1.1. Host Party(ies):**

&gt;&gt;

People's Republic of China.

**A.4.1.2. Region/State/Province etc.:**

&gt;&gt;

Hubei Province

**A.4.1.3. City/Town/Community etc:**

&gt;&gt;

Changyang Tujia Autonomous County, Yichang City

**A.4.1.4. Details of physical location, including information allowing the unique identification of this small-scale project activity :**

&gt;&gt;

The Project locates within Yazikou Town, Changyang Tujia Autonomous County, Yichang City, Hubei Province, P.R.China.

Changyang Tujia Autonomous County locates in southwest of Hubei Province mountainous area, east to Yidu City, south to Wufeng County, north to Zigui County and Yichang City, west to Badong County.

The Project has geographic coordinates with east longitude of 110°51' and north latitude of 30°30'. Figure 1



CDM – Executive Board

shows the location of Yichang City. Figure 2 shows the location of the Project.



Figure 1. The location of Yichang City



Figure 2. The location of the Project

**A.4.2. Type and category(ies) and technology/measure of the small-scale project activity:**

>>

Using the categorization of Appendix B to the *Simplified Modalities and Procedures for Small-scale CDM Project Activities*, the Project type and category are defined as follows:

**CDM – Executive Board**

Type I: Renewable energy projects  
 Category I.D.: Renewable Energy Generation for a Grid  
 Sub-category: Hydropower

Technology:

The Project is a diversion-type hydropower plant using two sets of 6.3 MW hydro turbines (CJA237-W-140/2×11) and associated generators (SFW6300-10/2150) to produce clean electricity without GHG emissions for CCPG via 35 kV transmission line. The key technical indicators of the hydro turbines and the generators of the Project are listed in Table 1.

Table 1. Key technical indicators of the hydro turbine and the generator of the Project

| Hydro Turbine |                         | Generator         |                 |
|---------------|-------------------------|-------------------|-----------------|
| Turbine Type  | CJA237-W-140/2×11       | Generator Type    | SFW6300-10/2150 |
| Rated Head    | 476.40m                 | Rated Capacity    | 7875kVA         |
| Most Head     | 507.84m                 | Rated Power       | 6300kW          |
| Least Head    | 476.40m                 | Rated Voltage     | 6.3kV           |
| Rated Flow    | 1.574 m <sup>3</sup> /s | Rated Electricity | 722A            |
| Rated Power   | 6562.5kW                | Rated Speed       | 600r/min        |
| Rated Speed   | 600r/min                | Power Factor      | 0.8             |

With all technologies and facilities provided domestically, the Project involves no technology transfer from abroad.

|   |
|---|
| <b>A.4.3 Estimated amount of emission reductions over the chosen <u>crediting period</u>:</b> |
|---|

>>

It is expected that the project activities will generate emission reductions for about 44,912 tCO<sub>2</sub>e per year over the first 7-year crediting period from Nov. 1<sup>st</sup>, 2007 to Oct. 31<sup>st</sup>, 2014.

| Years   | Annual estimation of emission reductions in tonnes of CO <sub>2</sub> e |
|---|---|
| 2007  | 44,912  |
| 2008  | 44,912  |
| 2009  | 44,912  |
| 2010  | 44,912  |
| 2011  | 44,912  |
| 2012  | 44,912  |
| 2013  | 44,912  |
| <b>Total estimated reductions (tonnes of CO<sub>2</sub>e)</b>                                       | 314,384   |
| <b>Total number of crediting years</b>  | 7   |
| <b>Annual average over the crediting period of estimated reductions (tonnes of CO<sub>2</sub>e)</b> | 44,912  |

|  |
|--|
| <b>A.4.4. Public funding of the <u>small-scale project activity</u>:</b> |
|--|




---

**CDM – Executive Board**

&gt;&gt;

There is no public funding from Annex I Parties for the Project.

|   |
|---|
| <p><b>A.4.5. Confirmation that the <u>small-scale project activity</u> is not a <u>debundled</u> component of a large scale project activity:</b></p> |
|---|

The project participants confirm that there is no registered small-scale CDM project activity or an application to register another small-scale CDM project activity with the same project participants, or that falls into the same project category and technique/instrument.

According to Appendix C to the *Simplified Modalities and Procedures for Small-scale CDM Project Activities*, the Project is not a debundled component of a larger project activity.

|   |
|---|
| <p><b>SECTION B. Application of a baseline and monitoring methodology</b></p> |
|---|

|   |
|---|
| <p><b>B.1. Title and reference of the <u>approved baseline and monitoring methodology</u> applied to the <u>small-scale project activity</u>:</b></p> |
|---|

&gt;&gt;

The methodology applied for the Project is the approved methodology for small-scale CDM project-“AMS-I.D. Grid connected renewable electricity generation” (version 12). For more information regarding the methodology, please refer to the link:

<http://cdm.unfccc.int/methodologies/SSCmethodologies/ approved.html>.

|  |
|--|
| <p><b>B.2 Justification of the choice of the project category:</b></p> |
|--|

&gt;&gt;

1. The Project is a newly-built hydropower plant with total capacity of 12.6 MW.
2. The Project is connected to CCPG, which is dominated by fossil fuel generation.

Therefore, the methodology AMS-I.D. is applicable to the Project.

|  |
|--|
| <p><b>B.3. Description of the <u>project boundary</u>:</b></p> |
|--|

&gt;&gt;

Based on the methodology AMS-I.D., the project boundary encompasses the physical, geographical site of the renewable generation source. The electricity displaced by the Project should be the electricity generated by CCPG. Therefore, the boundary could be identified as CCPG. The spatial extent of the project boundary covers those fossil fuel-fired power plants physically connected into CCPG that is influenced by the project activity.

CCPG is composed of Hubei Power Grid, Hunan Power Grid, Henan Power Grid, Jiangxi Power Grid,




---

**CDM – Executive Board**

Chongqing Power Grid and Sichuan Power Grid<sup>1</sup>.

|   |
|---|
| <b>B.4. Description of <u>baseline and its development</u>:</b> |
|---|

>>

For the Project, the possible alternative scenarios that provide outputs or services comparable to the Project should be as follows:

Alternative I: To implement the proposed project activity, but not as a CDM project activity;

Alternative II: To construct a thermal power plant with the same installed capacity as the Project;

Alternative III: To provide for the same annual electricity output as the Project by CCPG.

These alternatives are discussed as below:

Alternative I: The alternative is in compliance with current laws and regulations of China. However, according to the investment analysis in section B.5, the proposed project activity without CDM revenues is economically unattractive because the total investment's internal rate of return (IRR) is only 6.77%, lower than the financial benchmark IRR (10%). Therefore, Alternative I is not feasible and should not be the baseline scenario of the Project.

Alternative II: According to the current regulations in China, construction of coal-fired power plants with capacity of less than 135 MW are forbidden in the areas which can be covered by large grids<sup>2</sup>, and the fossil fuel-fired power units with capacity less than 100 MW is strictly limited for installation<sup>3</sup>. Therefore, Alternative II is not in compliance with current laws and regulations of China, and should not be the baseline scenario of the Project.

Alternative III: The alternative is in compliance with current laws and regulations of China and economically feasible.

In conclusion, Alternative III is the most likely one to be implemented among all the alternatives. Therefore Alternative III is identified as the baseline scenario of the Project. In absence of the Project, CCPG will provide for the same annual electricity output as the Project.

|   |
|---|
| <b>B.5. Description of how the anthropogenic emissions of GHG by sources are reduced below those that would have occurred in the absence of the registered <u>small-scale</u> CDM project activity:</b> |
|---|

---

1 *Notification on Determining Baseline Emission Factor of China's Grid* issued by China's DNA on Aug. 9<sup>th</sup>, 2006 <http://cdm.ccchina.gov.cn>

2 *Notice on Strictly Prohibiting the Installation of Fuel-fired Generators with the Capacity of 135 MW or below* issued by the General Office of the State Council, decree no. 2002-6.

3 *Interim Rules on the Installation and Management of Small-scale Fuel-fired Generators* (issued in Aug., 1997).





---

**CDM – Executive Board**

Additionality of the Project is demonstrated based on the requirement of Appendix A to the *Simplified Modalities and Procedures for Small-scale CDM Project Activities*.

As a small hydropower project located in poor mountainous area, the Project faces problems such as low tariff and annual output, which make the Project an economically unattractive course of action. The investment barrier is the most prohibitive factor in implementing the Project. Detailed analyses are shown as follows:

**Investment Barrier**

The purpose of this part is to determine whether the Project is economically attractive or not through appropriate analysis method.

*Determination of appropriate analysis method*

Three analysis methods are available: simple cost analysis, investment comparison analysis and benchmark analysis. Considering the Project has income from electricity sales, benchmark analysis is selected among these options. And also the internal return rate (IRR) of total investment is identified as the financial indicator.

According to *Economic Evaluation Code for Small Hydropower Projects* issued by the Ministry of Water Resources (Document No. SL16-95), the benchmark IRR of small hydropower project is 10%. Accordingly, if the IRR of total investment of the Project is lower than 10%, the project is not an economically attractive course of action and fulfils the requirement of additionality.

*Calculation and comparison*

The basic parameters for calculation of financial indicators of the Project are shown in *Table 2*.

Based on these data, the total investment's IRR of the Project is only 6.77% without the income from selling CERs. It is lower than the benchmark IRR for small hydro power projects (10%). Therefore, the Project is not financially feasible and fulfils the requirement of additionality.

## CDM – Executive Board

Table 2. Basic parameters for calculation of financial indicators of the Project

| Parameter name                          | Unit        | Project data |
|---|-------------|--------------|
| Installed capacity                      | MW          | 12.6         |
| Estimated annual output                 | MWh         | 46084.90     |
| Project lifetime                        | years       | 22           |
| Total investment                        | million RMB | 87.5         |
| Expected bus-bar tariff (including VAT) | RMB/kWh     | 0.267        |
| Rate of VAT                             |             | 6%           |
| Income Tax                              |             | 33%          |
| city maintenance and construction tax   |             | 1%           |
| education fee addition                  |             | 3%           |
| Period of depreciation                  | Years       | 20           |
| Rate of scrap value                     |             | 5%           |
| Operation cost                          | million RMB | 1.8309       |

*Sensitivity Analysis*

The objective of sensitivity analysis is to show whether the conclusion regarding the financial attractiveness is robust to reasonable variations in the critical assumptions.

The following key parameters have been selected as sensitivity indicators to test the financial attractiveness for the proposed project.

- w Estimated annual output
- w Total investment
- w Operation Cost

The results of sensitivity analysis are shown as *Table 3* and *Figure 3*:

Table 3 Results of sensitivity analysis

| Parameters              | Range Scope |      |      |      |      |      |
|-------------------------|-------------|------|------|------|------|------|
|                         | IRR (%)     | -10% | -5%  | 0    | 5%   | 10%  |
| Estimated Annual Output |             | 5.64 | 6.21 | 6.77 | 7.32 | 7.86 |
| Total Investment        |             | 7.89 | 7.31 | 6.77 | 6.28 | 5.82 |
| Operation Cost          |             | 7.05 | 6.91 | 6.77 | 6.64 | 6.50 |

## CDM – Executive Board

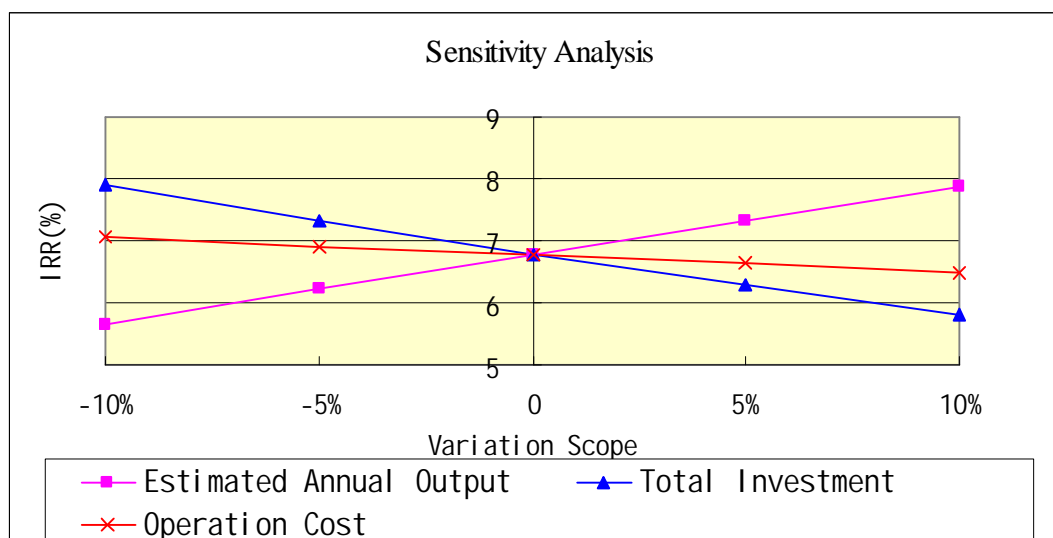


Figure 3 Results of sensitivity analysis

The sensitivity analysis shows that even the fluctuation range of the those sensitivity indicators reach 10%, the IRR of the total investment of the Project could not reach the benchmark and the conclusion regarding that the Project is financially unattractive is still tenable.

To sum up, without the CDM revenues, the Project has obvious investment barrier and fulfils the requirement of additionality.

## B.6. Emission reductions:

### B.6.1. Explanation of methodological choices:

>>

The methodology AMS-I.D is applicable to the Project.

#### Step 1. Baseline emissions calculation

Based on the methodology AMS-I.D, the baseline is the electricity produced by the renewable generating unit multiplied by an emission coefficient (measured in tCO<sub>2</sub>e/MWh) calculated in a transparent and conservative manner as:

- (a) A combined margin (CM), consisting of the combination of operating margin (OM) and build margin (BM) according to the procedures prescribed in the approved methodology ACM0002. Any of the four procedures to calculate the operating margin can be chosen, but the restrictions to use the Simple OM and the Average OM calculations must be considered
- (b) The weighted average emissions (in tCO<sub>2</sub>e/MWh) of the current generation mix. The data of the year in which project generation occurs must be used.

---

**CDM – Executive Board**

For the Project, method (a) is adopted to calculate the baseline emission coefficient.

According to ACM0002, to calculate the baseline emissions, emission factors of operating margin ( $EF_{OM,y}$ ) and build margin ( $EF_{BM,y}$ ) were determined by ex-ante. Then the baseline emission factor ( $EF_y$ ) is calculated as a combined margin (CM) of  $EF_{OM,y}$  and  $EF_{BM,y}$ .

**Substep 1.1. Calculate the Operating Margin emission factor(s) ( $EF_{OM,y}$ )**

The Operating Margin Emission Factor(s) ( $EF_{OM,y}$ ) is calculated based on one of the four following methods according to the approved methodology ACM0002:

- (a) Simple OM, or
- (b) Simple adjusted OM, or
- (c) Dispatch data analysis OM, or
- (d) Average OM.

The application of method (c) requires availability of dispatch data. However, the detailed data of dispatch are taken as confidential business information by the grid company and not publicly available. Thus, method (c) cannot be adopted for the Project. Similarly, the data of annual load duration curve required by method (b) also can not be obtained publicly. Therefore, method (b) is also not applicable here.

Among the total electricity generations of CCPG, the amount of low-cost/must run resources accounts for about 37% in 2001, 36% in 2002, 34% in 2003, 39% in 2004, and 38% in 2005<sup>4</sup>, all less than 50%. It can't fulfil the requirement of method (d), but fulfils the requirement of method (a). Thus, the method (a) can be used to calculate the operating margin emission factor ( $EF_{OM,y}$ )

For the Project, *ex-ante* data are used for calculating the OM emission factor ( $EF_{OM,y}$ ).

In accordance with ACM0002, the simple OM emission factor ( $EF_{OM, simple,y}$ ) is calculated as:

$$EF_{OM, simple,y} = \frac{\sum_{i,j} F_{i,j,y} \cdot COEF_{i,j,y}}{\sum_j GEN_{j,y}} \quad (1)$$

where:

---

<sup>4</sup> China Electric Power Yearbook, 2002~2006 Edition.




---

**CDM – Executive Board**

$F_{i,j,y}$  is the total amount of fuel  $i$  (in a mass or volume unit) consumed by all the relevant power sources  $j$  in year(s)  $y$ ,  $j$  refers to the power sources serving the grid, excluding those low-operating cost and must-run power plants, and including imports to the grid<sup>5</sup>,

$COEF_{i,j,y}$  is the CO<sub>2</sub> emission coefficient of fuel  $i$  (tCO<sub>2</sub>/mass or volume unit of the fuel), taking into account the carbon content of the fuels used by relevant power sources  $j$  and the oxidation rate of the fuel in year(s)  $y$ , and

$GEN_{j,y}$  is the electricity output (MWh) supplied to the grid by the sources  $j$ .

The CO<sub>2</sub> emission coefficient  $COEF_i$  is obtained from formula (2) as:

$$COEF_i = NCV_i \cdot EF_{CO_2,i} \cdot OXID_i \quad (2)$$

where:

$NCV_i$  is the net calorific value (energy content) per mass or volume unit of fuel  $i$  (here the country-specific values are adopted),

$EF_{CO_2,i}$  is the CO<sub>2</sub> emission factor per unit of energy of the fuel  $i$  (here the IPCC default values are adopted),

$OXID_i$  is the oxidation factor of the fuel  $i$  (here the IPCC default values are adopted).

The data on electricity generation and auxiliary electricity consumption are obtained from the *China Electric Power Yearbook* from 2002 to 2006 (published annually). The data on different fuel consumptions for power generation and the net caloric values of the fuels are obtained from the *China Energy Statistical Yearbook* from 2004 to 2006 (published annually). The emission factors and oxidation factors of the fuels adopted are obtained from *Table 1.3 and Table 1.4, Volume 2 Energy, "2006 IPCC Guidelines for National Greenhouse Gas Inventories", P1.21-1.24.*

**Substep 1.2. Calculate the Build Margin emission factor ( $EF_{BM,y}$ )**

For the Project, *ex-ante* data are used for calculating the BM emission factor ( $EF_{BM,y}$ ).

According to ACM0002, the build margin emission factor ( $EF_{BM,y}$ ) is calculated using the following formula (3):

---

<sup>5</sup> An import from a connected electricity system should be considered as one power source  $j$ .

---

**CDM – Executive Board**

$$EF_{BM,y} = \frac{\sum_{i,m} F_{i,m,y} \cdot COEF_{i,m,y}}{\sum_m GEN_{m,y}} \quad (3)$$

where:

$F_{i,m,y}$ ,  $COEF_{i,m,y}$  and  $GEN_{m,y}$  are analogous to the variables described in *Substep 1.1* above for plants  $m$ .

Currently in China, the build margin data of sampling plants group  $m$  are not available publicly. Taking notice of this situation, EB accepts the following deviation in application of methodology AM0005 in China<sup>6</sup>:

- 2 Use of capacity additions during the last 1~3 years for estimating the build margin emission factor for grid electricity.
- 2 Use of weights estimated using installed capacity in place of annual electricity generation.

And it is suggested to use the efficiency level of the best technology commercially available in the provincial/regional or national grid of China, as a conservative proxy.

Since methodology AM0005 has been replaced by the consolidated methodology ACM0002, the deviation above is also applicable to the consolidated methodology ACM0002. Therefore, for the Project: Firstly, calculate the share of different power generation technology in recent capacity additions. Secondly, calculate the weight for capacity additions of each power generation technology. And finally, calculate the emission factor using the efficiency level of the best technology commercially available in China.

Since the data of thermal power capacities, which can be obtained at present, can not be separated into coal-based, oil-based and gas-based, the BM is calculated with following steps and formula:

*Substep 1.2.1 Calculate the power generation emissions for solid, liquid and gas fuel and each share of total emissions based on the Energy Balance Table of the most recent year.*

$$I_{Coal} = \frac{\sum_{i \in COAL,j} F_{i,j,y} \times COEF_{i,j}}{\sum_{i,j} F_{i,j,y} \times COEF_{i,j}} \quad (4)$$

$$I_{Oil} = \frac{\sum_{i \in OIL,j} F_{i,j,y} \times COEF_{i,j}}{\sum_{i,j} F_{i,j,y} \times COEF_{i,j}} \quad (5)$$

---

<sup>6</sup> <http://cdm.unfccc.int/Projects/Deviations>

---

**CDM – Executive Board**

$$I_{Gas} = \frac{\sum_{i \in GAS, j} F_{i,j,y} \times COEF_{i,j}}{\sum_{i,j} F_{i,j,y} \times COEF_{i,j}} \quad (6)$$

where:

$F_{i,j,y}$  is the amount of fuel  $i$  (in a mass or volume unit) consumed by province  $j$  in year(s)  $y$ ,

$COEF_{i,j,y}$  is the CO<sub>2</sub> emission coefficient of fuel  $i$  (tCO<sub>2</sub>/tCe), taking into account the carbon content of the fuels (coal, oil and gas) used by province  $j$  and the percent oxidation of the fuel in year(s)  $y$ , and

*COAL*, *OIL* and *GAS* are footnote group for solid fuels, liquid fuels and gas fuels.

*Substep 1.2.2 Calculate emission factor for thermal power of each grid based on the result of Substep 1.2.1 and the efficiency level of the best technology commercially available in China.*

$$EF_{Thermal} = I_{Coal} \times EF_{Coal,Adv} + I_{Oil} \times EF_{Oil,Adv} + I_{Gas} \times EF_{Gas,Adv} \quad (7)$$

Where  $EF_{Coal,Adv}$ ,  $EF_{Oil,Adv}$  and  $EF_{Gas,Adv}$  represent the efficiency level of the best coal-based, oil-based and gas-based power generation technology commercially available in China.

*Substep 1.2.3 Calculate BM of the grid based on the result of Substep 1.2.2 and the share of thermal power of recent 20% capacity additions.*

$$EF_{BM,y} = \frac{CAP_{Thermal}}{CAP_{Total}} \times EF_{Thermal} \quad (8)$$

Where  $CAP_{Total}$  is total capacity additions while  $CAP_{Thermal}$  is capacity additions of thermal power.

The data on different fuel consumptions for power generation and the net caloric values of the fuels are obtained from the *China Energy Statistical Yearbook* from 2004 to 2006 (published annually). The emission factors and oxidation factors of the fuels adopted are obtained from *Table 1.3 and Table 1.4, Volume 2 Energy, "2006 IPCC Guidelines for National Greenhouse Gas Inventories"*, P1.21-1.24.

With reference to the *Notification on Determining Baseline Emission Factors of China Power Grid*<sup>7</sup>, the weighted average fuel consumption for power generation of 15 sets of 600 MW sub-critical coal-fired power generators built in 2005 (343.33 gCe/kWh) and the 200 MW oil/gas based combined cycle power

---

<sup>7</sup> Chinese DNA ([http:// http://cdm.ccchina.gov.cn](http://http://cdm.ccchina.gov.cn)), Aug. 9<sup>th</sup>, 2007

---

**CDM – Executive Board**

generators (258 gCe/kWh) are taken as the efficiency level of the best technology commercially available in China.

***Substep 1.3. Calculate the Baseline Emission Factor ( $EF_y$ )***

Based on the approved methodology ACM0002, the baseline emission factor ( $EF_y$ ) is calculated as the weighted average of the operating margin emission factor ( $EF_{OM,y}$ ) and the build margin emission factor ( $EF_{BM,y}$ ), as

$$EF_y = w_{OM} \cdot EF_{OM,y} + w_{BM} \cdot EF_{BM,y} \quad (9)$$

According to the approved methodology ACM0002, the weight  $w_{OM}$  and the weight  $w_{BM}$  are both take 0.5 as default.

***Substep 1.4 Calculate the Baseline Emissions***

Baseline emissions are calculated with baseline emission factor ( $EF_y$ ) and electricity supplied by the Project to the grid ( $EG_y$ ), as follows:

$$BE_y = EG_y \times EF_y \quad (10)$$

**Step 2. Project activity emissions**

According to the approved methodology ACM0002, the reservoir power density of the Project (252W/m<sup>2</sup>) is larger than the benchmark (10 W/m<sup>2</sup>). the Project emission ( $PE_y$ ) could be regard as zero, as  $PE_y = 0$  tCO<sub>2</sub>e.

**Step 3. Leakage**

As newly built hydropower plants, there is no energy generating equipment be transferred from another activity and no existing equipment be transferred to another activity involved in the project activities. No leakage is considered in the Project, as  $L_y = 0$  tCO<sub>2</sub>e.

**Step 4. Emission reductions**





### CDM – Executive Board

The emission reductions ( $ER_y$ ) by the Project activity during a given year  $y$  is the difference between baseline emissions ( $BE_y$ ), project activity emissions ( $PE_y$ ) and leakage ( $L_y$ ), as follows:

$$ER_y = BE_y - PE_y - L_y \quad (11)$$

#### B.6.2. Data and parameters that are available at validation:

|   |  |
|---|--|
| <b>Data / Parameter:</b>  | <i>Power generation</i>  |
| Data unit:  | <i>MWh</i>   |
| Description:  | <i>The total power generation and power generated by low-cost/must run power plants within CCPG in year 2001, 2002, 2003, 2004 and 2005.</i>   |
| Source of data used:  | <i>China Electric Power Yearbook 2002, 2003, 2004, 2005 and 2006 Edition.</i>  |
| Value applied:  |  |
| Justification of the choice of data or description of measurement methods and procedures actually applied : | <i>CCPG is defined as the project boundary of the Project.<br/><br/>According ACM0002, method of simple OM can only be used where low-cost/must run resources constitute less than 50% of total grid generation.</i> |
| Any comment:  | <i>Official data</i>   |

|   |   |
|---|---|
| <b>Data / Parameter:</b>  | $GEN_{j,y}$   |
| Data unit:  | <i>MWh</i>  |
| Description:  | <i>The power generation supplied to CCPG in year 2003, 2004 and 2005, excluding those generated by low-cost/must run power plants.</i>  |
| Source of data used:  | <i>China Electric Power Yearbook 2004, 2005 and 2006 Edition.</i>   |
| Value applied:  | <i>Detailed in Annex 3.</i>   |
| Justification of the choice of data or description of measurement methods and procedures actually applied : | <i>CCPG is defined as the project boundary of the Project.<br/><br/>According ACM0002, the generation by low-operating cost and must-run power plants within CCPG are excluded from calculation of simple OM emission factor.</i> |
| Any comment:  | <i>Official data</i>  |



## CDM – Executive Board

|   |  |
|---|--|
| <b>Data / Parameter:</b>  | <i>Installed Capacity</i>  |
| Data unit:  | <i>MW</i>  |
| Description:  | <i>The installed capacity of different power sources within CCPG in year 2003, 2004 and 2005.</i>  |
| Source of data used:  | <i>China Electric Power Yearbook 2004, 2005 and 2006 Edition.</i>  |
| Value applied:  | <i>Detailed in Annex 3.</i>  |
| Justification of the choice of data or description of measurement methods and procedures actually applied : | <i>CCPG is defined as the project boundary of the Project.<br/><br/>According to the deviation accepted by the EB, the installed capacities of different power sources within CCPG are used in place of annual electricity generation for calculation of BM emission factor.</i> |
| Any comment:  | <i>Official data</i>   |

|   |   |
|---|---|
| <b>Data / Parameter:</b>  | $F_{i,j,y}$   |
| Data unit:  | $10^4 t$ or $10^8 m^3$  |
| Description:  | <i>Different fossil fuel consumptions for power generation within CCPG in year 2003, 2004 and 2005.</i> |
| Source of data used:  | <i>China Energy Statistical Yearbook 2004, 2005 and 2006 Edition.</i>                                   |
| Value applied:  | <i>Detailed in Annex 3.</i>   |
| Justification of the choice of data or description of measurement methods and procedures actually applied : | <i>CCPG is the project boundary of the Project.</i>   |
| Any comment:  | <i>Official data</i>  |

|   |  |
|---|--|
| <b>Data / Parameter:</b>  | $NCV_i$  |
| Data unit:  | $MJ/t$ or $MJ/10^3 m^3$  |
| Description:  | <i>Average low calorific values of different fuels for electricity generation.</i> |
| Source of data used:  | <i>China Energy Statistical Yearbook 2006 Edition, P287.</i>                       |
| Value applied:  | <i>Detailed in Annex 3.</i>  |
| Justification of the choice of data or description of measurement methods and procedures actually applied : | <i>China-specific values are adopted.</i>  |
| Any comment:  | <i>Official data</i>   |



## CDM – Executive Board

|   |  |
|---|--|
| <b>Data / Parameter:</b>  | $EF_{CO_2,i}$  |
| Data unit:  | $tC/TJ$  |
| Description:  | <i>Emission factors of fuels for electricity generation.</i>   |
| Source of data used:  | <i>Table 1.3 and Table 1.4, Volume 2 Energy, "2006 IPCC Guidelines for National Greenhouse Gas Inventories", P1.21-1.24.</i> |
| Value applied:  | <i>Detailed in Annex 3.</i>  |
| Justification of the choice of data or description of measurement methods and procedures actually applied : | <i>IPCC world-wide default values are adopted.</i>   |
| Any comment:  | <i>IPCC data</i>   |

|   |  |
|---|--|
| <b>Data / Parameter:</b>  | $OXID_i$   |
| Data unit:  |  |
| Description:  | <i>Oxidation rates of fuels for power generation.</i>  |
| Source of data used:  | <i>Table 1.3 and Table 1.4, Volume 2 Energy, "2006 IPCC Guidelines for National Greenhouse Gas Inventories", P1.21-1.24.</i> |
| Value applied:  | <i>Detailed in Annex 3.</i>  |
| Justification of the choice of data or description of measurement methods and procedures actually applied : | <i>IPCC world-wide default values are adopted.</i>   |
| Any comment:  | <i>IPCC data</i>   |

|   |   |
|---|---|
| <b>Data / Parameter:</b>  | <i>Best efficiency level of thermal power</i>   |
| Data unit:  |   |
| Description:  | <i>The efficiency level of the best coal-based, oil-based and gas-based power generation technology commercially available in China.</i>  |
| Source of data used:  | <i>Notification on Determining Baseline Emission Factors of China Power Grid</i>  |
| Value applied:  | <i>Detailed in Annex 3.</i>   |
| Justification of the choice of data or description of measurement methods and procedures actually applied : | <i>According to the deviation accepted by EB, the efficiency level of the best technology commercially available in the national grid of China is used as a conservative value for the calculation of BM emission factor.</i> |
| Any comment:  | <i>Official data</i>  |




---

**CDM – Executive Board**

|   |
|---|
| <b>B.6.3. Ex-ante calculation of emission reductions:</b> |
|---|

**Baseline emissions calculation**

With reference to the *Notification on Determining Baseline Emission Factors of China Power Grid*<sup>8</sup> issued by Chinese DNA on August 9<sup>th</sup>, 2007, the OM emission factor ( $EF_{OM,y}$ ) of CCPG is 1.2899 tCO<sub>2</sub>e/MWh, and the build margin emission factor ( $EF_{BM,y}$ ) of CCPG is 0.6592 tCO<sub>2</sub>e/MWh.

Based on formula (9) in section B.6.1, the baseline emissions factor ( $EF_y$ ) of CCPG is calculated as 0.97455 tCO<sub>2</sub>e/MWh.

The electricity output of the Project is estimated as 46084.90MWh per year, therefore the baseline emissions of the Project is estimated as 44,912 tCO<sub>2</sub>e per year.

**Project activity emissions calculation**

As described in section B.6.1, the Project activity emissions ( $PE_y$ ) will be 0 tCO<sub>2</sub>e.

**Leakage**

As described in section B.6.1, the leakage of the Project ( $L_y$ ) will be 0 tCO<sub>2</sub>e.

**Emission reductions calculation**

Based on formula (11) in section B.6.1, the ex-ante annual emission reductions are estimated as 44,912 tCO<sub>2</sub>e.

|  |
|--|
| <b>B.6.4 Summary of the ex-ante estimation of emission reductions:</b> |
|--|

>>

It is expected that the project activities will generate emission reductions for about 44,912 tCO<sub>2</sub>e per year over the first 7-year crediting period from Nov. 1<sup>st</sup>, 2007 to Oct. 31<sup>st</sup>, 2014.

---

<sup>8</sup> Chinese DNA ([http:// http://cdm.ccchina.gov.cn](http://http://cdm.ccchina.gov.cn)), Dec. 15<sup>th</sup>, 2006

## CDM – Executive Board

| Year                            | Estimation of project activity emissions (tonnes of CO <sub>2</sub> e) | Estimation of baseline emissions (tonnes of CO <sub>2</sub> e) | Estimation of leakage (tonnes of CO <sub>2</sub> e) | Estimation of overall emission reductions (tonnes of CO <sub>2</sub> e) |
|---------------------------------|--|--|---|---|
| 2007                            | 0  | 44,912   | 0   | 44,912  |
| 2008                            | 0  | 44,912   | 0   | 44,912  |
| 2009                            | 0  | 44,912   | 0   | 44,912  |
| 2010                            | 0  | 44,912   | 0   | 44,912  |
| 2011                            | 0  | 44,912   | 0   | 44,912  |
| 2012                            | 0  | 44,912   | 0   | 44,912  |
| 2013                            | 0  | 44,912   | 0   | 44,912  |
| <b>Total (tCO<sub>2</sub>e)</b> | <b>0</b>   | <b>314,384</b>   | <b>0</b>  | <b>314,384</b>  |

|  |
|--|
| <b>B.7 Application of a monitoring methodology and description of the monitoring plan:</b> |
|--|

|   |
|---|
| <b>B.7.1 Data and parameters monitored:</b> |
|---|

&gt;&gt;

|  |   |
|--|---|
| <b>Data / Parameter:</b>   | <i>EG<sub>y</sub></i>                                   |
| Data unit:   | <i>MWh</i>  |
| Description:   | <i>Electricity supplied to the grid by the Project.</i> |
| Source of data to be used:                                       | <i>Measured directly.</i>                               |
| Value of data  |   |
| Description of measurement methods and procedures to be applied: | <i>Please refer to Part B.7.2.</i>                      |
| QA/QC procedures to be applied:                                  | <i>Please refer to Part B.7.2.</i>                      |
| Any comment:   |   |

|  |   |
|--|---|
| <b>Data / Parameter:</b>   | <i>Surface area of the reservoir</i>  |
| Data unit:   | <i>m<sup>2</sup></i>  |
| Description:   | <i>Surface area of the reservoir at full level</i>  |
| Source of data to be used:                                       |   |
| Value of data  |   |
| Description of measurement methods and procedures to be applied: | <i>The area will be monitored based on topographical data and the height of the dam</i>                 |
| QA/QC procedures to be applied:                                  |   |
| Any comment:   | <i>Monitored once at start of the project. Monitored data will be kept during the crediting period.</i> |

---

**CDM – Executive Board**

|  |
|--|
| <b>B.7.2 Description of the monitoring plan:</b> |
|--|

&gt;&gt;

In this PDD, emission factor of the Project is determined ex-ante. Therefore the net electricity generation supplied to the grid by the Project is defined as the key data to be monitored. The monitoring plan is drafted to focus on monitoring of this data.

### 1. Implementation of the monitoring plan

The Project owner will take the responsibility for the monitoring plan implementation. A CDM working team, which is supervised by a manager, will be established. It consists of CDM principal, technical staff, and statistic staff. Organizational structure of the CDM team is shown as *figure 4*.

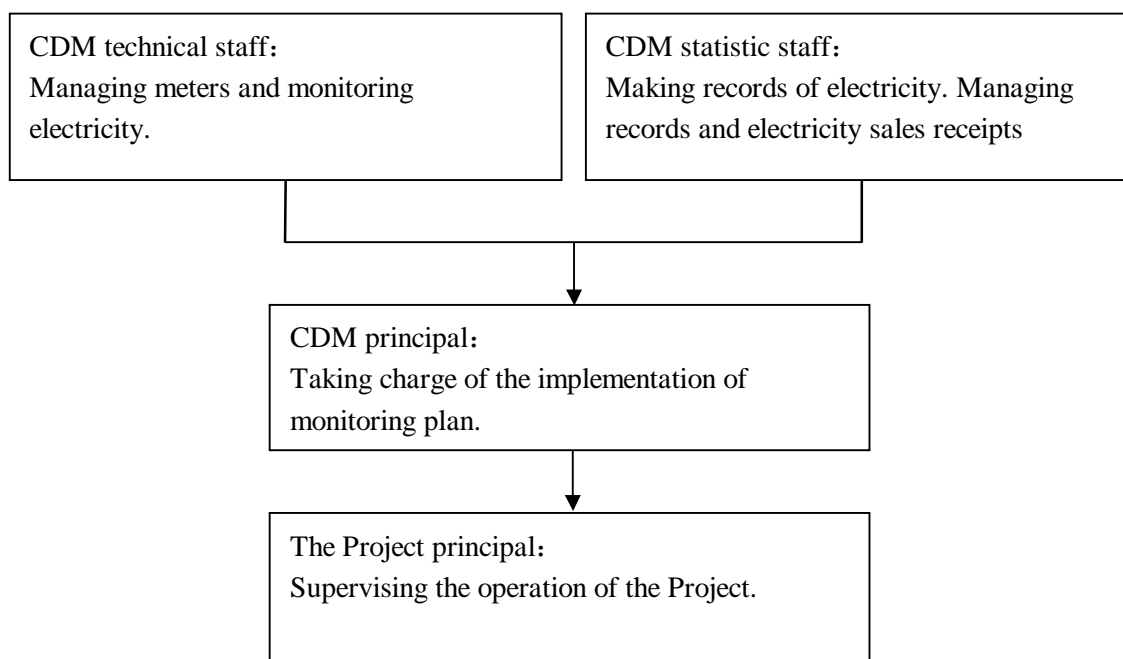


Figure 4 Structure of the CDM team

### 2. Monitoring of the electricity supplied to and drawn from the grid by the Project

The net electricity generation delivered to CCPG by the Project will be continuously monitored through the gateway meters. The measured data will be collected and recorded periodically.

All the relevant data records will be kept by the Project owner during the crediting period and two years after for DOE's verification.



---

**CDM – Executive Board****3. Quality assurance and quality control**

The quality assurance and quality control procedures involves of data monitoring, recording, maintaining and archiving, and monitoring equipment calibration.

The electricity generation delivered by the Project to CCPG will be monitored through gateway meters and double-checked against relevant electricity sales receipts and/or records for quality control. The Parallel Operation Agreement and the Power Purchase Agreement between the Project owner and the grid company can be used as assurance on data collection and documentation.

Calibration of Meters & Metering should be implemented periodically according to national standards and rules. All the records should be documented by the project owner for DOE's verification.

**4. Verification**

It is expected that the verification of emission reductions generated from the Project will be done annually.



---

**CDM – Executive Board**

|   |
|---|
| <b>B.8 Date of completion of the application of the baseline and monitoring methodology and the name of the responsible person(s)/entity(ies)</b> |
|---|

>>

Completion date: 10/08/2007

Entity: Cleanergy Investment Service (Beijing) Co., Ltd.

Address: Capital Times Square, 88 Xichangan Jie, Beijing, China, 100031.

Tel: +86-10-83914567

Fax: +86-10-83914555

The entity is not the project participants listed in Annex 1.






---

**CDM – Executive Board**
**SECTION C. Duration of the project activity / crediting period**
**C.1 Duration of the project activity:**
**C.1.1. Starting date of the project activity:**

&gt;&gt;

01/10/2007(Operation starting date)

**C.1.2. Expected operational lifetime of the project activity:**

&gt;&gt;

20y-0m.

**C.2 Choice of the crediting period and related information:**
**C.2.1. Renewable crediting period**
**C.2.1.1. Starting date of the first crediting period:**

&gt;&gt;

01/11/2007

**C.2.1.2. Length of the first crediting period:**

&gt;&gt;

7y-0m.

**C.2.2. Fixed crediting period:**
**C.2.2.1. Starting date:**

&gt;&gt;

Not applicable.

**C.2.2.2. Length:**

&gt;&gt;

Not applicable.



---

**CDM – Executive Board****SECTION D. Environmental impacts**

&gt;&gt;

**D.1. If required by the host Party, documentation on the analysis of the environmental impacts of the project activity:**

&gt;&gt;

The *Environmental Impact Assessment* (EIA) of the Project was approved by the Environment Protection Bureau of Hubei Province in Jan., 2005 (Document No.: Ehuanhan[2005]38).

According to the *Preliminary Design Report* and the EIA, environmental impacts possibly caused by the Project and measures of protecting adopted by the project owner are analyzed as follows:

**Terrestrial Ecological Environment**

The operation and land submergence of the Project will impact the vegetation. The project owner will afforest the construction sites and recover the vegetation.

**Waste Water**

Waste water will be generated by production and living activities during the construction and operation of the Project. Constructional waste water will be treated by means of sedimentation tank. Waste water resulting from living activities will be treated by septic tank. The quality of waste water will meet wastewater discharging standards.

**Air pollution and noise**

Fugitive dust from paved roads and noises from various machines during construction of the Project will impact the on-site construction staff temporarily. The project owner will reduce these impacts by means of sprinkling at irregular intervals, reducing dust, limiting speed of vehicles and adopting corresponding protective measures. These impacts will be eliminated at the end of the construction.

**Soil and water losses**

Soil erosion would take place with the construction of the Project because of excavation of earth, construction and solid waste dumping. Engineering measures and ecological measures will be taken, the former one includes residue retaining, slope protecting, flood control, draining, and the latter one includes promoting recovery of vegetation.

To sum up, negative impacts on the environment caused by the Project mainly appear on the construction period which will disappear with the completion of the Project construction. The Project will not have significant impacts on the environment in conjunction with the implementation of a series of environment protection measures during the construction and operation period.

In conclusion, environmental impacts arising from the Project are considered insignificant.




---

**CDM – Executive Board**

**D.2. If environmental impacts are considered significant by the project participants or the host Party, please provide conclusions and all references to support documentation of an environmental impact assessment undertaken in accordance with the procedures as required by the host Party:**

>>

The Project does not have significant impacts on local environment and the EIA of the Project has been approved by the local environmental protection authority.

**SECTION E. Stakeholders' comments**

>>

**E.1. Brief description how comments by local stakeholders have been invited and compiled:**

>>

Staff from the Project owner carried out a survey to the local stakeholders of the Project in 2006. The questionnaires information of 40 residents is listed in *table 4*.

Table 4. Information of informants

| Subject        | Gender |        | Vocation |        |                     |        | Nationality |       |
|----------------|--------|--------|----------|--------|---------------------|--------|-------------|-------|
|                | Male   | Female | Peasant  | Worker | Government Employee | Others | Han         | Tujia |
| Quantity       | 30     | 10     | 16       | 11     | 10                  | 3      | 19          | 21    |
| Proportion (%) | 75     | 25     | 40       | 27.5   | 25                  | 7.5    | 47.5        | 52.5  |

**E.2. Summary of the comments received:**

>>

40 questionnaires were handed around and 100% were collected at last. The following is a summary of the key findings based on 40 returned questionnaires.

- All the respondents (100%) are aware of and support the construction of the Project.
- All the respondents (100%) request to construct the Project immediately.
- With regard to positive influences of the Project to the local, 97.5% of respondents consider that it will play an important role in regional development, 95% of respondents consider that it will accelerate local economy development, 75% of respondents consider that it will advance people's living level, and 65% of respondents believe that it will increase work opportunities.
- 17.5% of the respondents point out that the negative influences of the Project is land occupation.
- The respondents suggest that it is important to protect environment during construction of the Project.

**E.3. Report on how due account was taken of any comments received:**

>>

The Project owner has paid much attention to the comments and suggestions of stakeholders and will communicate with them to understand their demands better. To alleviate negative influences of the Project,



---

**CDM – Executive Board**

the Project owner will continually communicate with stakeholders and take full consideration of the comments and suggestions received during the construction and operation periods of the Project.

- 2 For the concern about land occupation of the Project, the Project owner will recover the vegetation and compensate local stakeholders according to related statute and local regulations.
- 2 For the environment protection during construction and operation of the Project, the Project owner will take more explicit measures, which are designed in *Environment Impact Assessment Report*, to enhance the environment protection work. These efforts could meet the requirement of environment protection from local residents

To sum up, all the residents and local government support construction of the Project.

Annex 1**CONTACT INFORMATION ON PARTICIPANTS IN THE PROJECT ACTIVITY**

|                         |  |
|-------------------------|--|
| <b>Organization:</b>    | Changyang Jinglong Hydropower Development Co., Ltd.        |
| <b>Street/P.O.Box:</b>  | No.14, Qingjiang Road, Longzhouping Town, Changyang County |
| <b>Building:</b>        | -  |
| <b>City:</b>            | Yichang City   |
| <b>State/Region:</b>    | Hubei Province   |
| <b>Postfix/ZIP:</b>     | 443500   |
| <b>Country:</b>         | P.R.China  |
| <b>Telephone:</b>       | +86-0717-5327758   |
| <b>FAX:</b>             | +86-0717-5334888   |
| <b>E-Mail:</b>          | -  |
| <b>URL:</b>             | -  |
| <b>Represented by:</b>  | Jiang Daping   |
| <b>Title:</b>           | B.C  |
| <b>Salutation:</b>      | Mr.  |
| <b>Last Name:</b>       | Jiang  |
| <b>Middle Name:</b>     | -  |
| <b>First Name:</b>      | Daping   |
| <b>Department:</b>      | -  |
| <b>Mobile:</b>          | -  |
| <b>Direct FAX:</b>      | +86-0578-5092068   |
| <b>Direct tel:</b>      | +86-0578-5091389   |
| <b>Personal E-Mail:</b> | <a href="mailto:jnjdp@163.com">jnjdp@163.com</a>           |



## CDM – Executive Board

|                         |  |
|-------------------------|--|
| <b>Organization:</b>    | Essent Energy Trading B.V.   |
| <b>Street/P.O.Box:</b>  | Statenlaan 8 /P.O. Box 689   |
| <b>Building:</b>        | -  |
| <b>City:</b>            | Den Bosch  |
| <b>State/Region:</b>    | -  |
| <b>Postfix/ZIP:</b>     | 5223 LA  |
| <b>Country:</b>         | Netherlands  |
| <b>Telephone:</b>       | +31 73 853 11 01   |
| <b>FAX:</b>             | +31 73 853 15 78   |
| <b>E-Mail:</b>          | <a href="mailto:Ruben.benders@essent.nl">Ruben.benders@essent.nl</a> |
| <b>URL:</b>             | <a href="http://www.essent.nl">www.essent.nl</a>                     |
| <b>Represented by:</b>  | P. Aliabadi  |
| <b>Title:</b>           | Managing Director  |
| <b>Salutation:</b>      | Mr.  |
| <b>Last Name:</b>       | Aliabadi   |
| <b>Middle Name:</b>     | -  |
| <b>First Name:</b>      | Paymon   |
| <b>Department:</b>      | Energy Management Group  |
| <b>Mobile:</b>          | -  |
| <b>Direct FAX:</b>      | +31 73 853 15 78   |
| <b>Direct tel:</b>      | +31 73 853 15 00   |
| <b>Personal E-Mail:</b> | -  |



---

CDM – Executive Board

Annex 2

**INFORMATION REGARDING PUBLIC FUNDING**

There is no public funding from Annex I Parties for the Project.

---

**CDM – Executive Board**
**Annex 3****BASELINE INFORMATION**

Data recommended in the *Notification on Determining Baseline Emission Factors of China power Grid*<sup>9</sup> (issued by Chinese DNA) for CCPG are adopted for the Project.

Table A1~A3 show the thermal power generation supplied to CCPG in 2003, 2004 and 2005.

Table A1. Thermal power supplied to CCPG in 2003

|                  | Thermal power generation | Auxiliary electricity consumption | Thermal power supplied to the grid |
|------------------|--------------------------|-----------------------------------|------------------------------------|
|                  | (MWh)                    | (%)                               | (MWh)                              |
| <b>Jiangxi</b>   | 27165000                 | 6.43                              | 25418291                           |
| <b>Henan</b>     | 95518000                 | 7.68                              | 88182218                           |
| <b>Hubei</b>     | 39532000                 | 3.81                              | 38025831                           |
| <b>Hunan</b>     | 29501000                 | 4.58                              | 28149854                           |
| <b>Chongqing</b> | 16341000                 | 8.97                              | 14875212                           |
| <b>Sichuan</b>   | 32782000                 | 4.41                              | 31336314                           |
| <b>Total</b>     |                          |                                   | 225987719                          |

*Data source: China Electric Power Yearbook 2004 Edition.*

---

<sup>9</sup> <http://cdm.ccchina.gov.cn/>



## CDM – Executive Board

Table A2. Thermal power supplied to CCPG in 2004

|                  | Thermal power generation | Auxiliary electricity consumption | Thermal power supplied to the grid |
|------------------|--------------------------|-----------------------------------|------------------------------------|
|                  | (MWh)                    | (%)                               | (MWh)                              |
| <b>Jiangxi</b>   | 30127000                 | 7.04                              | 28006059                           |
| <b>Henan</b>     | 109352000                | 8.19                              | 100396071                          |
| <b>Hubei</b>     | 43034000                 | 6.58                              | 40202363                           |
| <b>Hunan</b>     | 37186000                 | 7.47                              | 34408206                           |
| <b>Chongqing</b> | 16520000                 | 11.06                             | 14692888                           |
| <b>Sichuan</b>   | 34627000                 | 9.41                              | 31368599                           |
| <b>Total</b>     |                          |                                   | 249074186                          |

Data source: China Electric Power Yearbook 2005 Edition.

Table A3. Thermal power supplied to CCPG in 2005

|                  | Thermal power generation | Auxiliary electricity consumption | Thermal power supplied to the grid |
|------------------|--------------------------|-----------------------------------|------------------------------------|
|                  | (MWh)                    | (%)                               | (MWh)                              |
| <b>Jiangxi</b>   | 30000000                 | 6.48                              | 28056000                           |
| <b>Henan</b>     | 131590000                | 7.32                              | 121957612                          |
| <b>Hubei</b>     | 47700000                 | 2.51                              | 46502730                           |
| <b>Hunan</b>     | 39900000                 | 5.00                              | 37905000                           |
| <b>Chongqing</b> | 17584000                 | 8.05                              | 16168488                           |
| <b>Sichuan</b>   | 37202000                 | 4.27                              | 35613475                           |
| <b>Total</b>     |                          |                                   | 286203305                          |

Data source: China Electric Power Yearbook 2006 Edition.

With reference to the *Notification on Determining Baseline Emission Factors of China Power Grid*, Table A4 shows the low calorific values, emission factors and oxidation rates of fuels consumed for electricity generation that are to be used in the following OM emission factor calculation and BM emission factor calculation.

Table A4. Data of fuels consumed for electricity generation

| Fuel type                | Low calorific value | Emission factor (tc/TJ) | Oxidation rate |
|--------------------------|---------------------|-------------------------|----------------|
| <b>Raw coal</b>          | 20908 kJ/kg         | 25.80                   | 1              |
| <b>Cleaned coal</b>      | 26344 kJ/kg         | 25.80                   | 1              |
| <b>Other washed coal</b> | 8363 kJ/kg          | 25.80                   | 1              |
| <b>Coke</b>              | 28435 kJ/kg         | 25.80                   | 1              |
| <b>Crude oil</b>         | 41816 kJ/kg         | 20.00                   | 1              |
| <b>Gasoline</b>          | 43070 kJ/kg         | 18.90                   | 1              |
| <b>Kerosene</b>          | 43070 kJ/kg         | 19.60                   | 1              |
| <b>Diesel</b>            | 42652 kJ/kg         | 20.20                   | 1              |




---

**CDM – Executive Board**

|                                 |                         |       |   |
|---------------------------------|-------------------------|-------|---|
| <b>Fuel oil</b>                 | 41816 kJ/kg             | 21.10 | 1 |
| <b>Other petroleum products</b> | 38369 kJ/kg             | 20.00 | 1 |
|                                 |                         |       |   |
| <b>Natural gas</b>              | 38931 kJ/m <sup>3</sup> | 15.30 | 1 |
| <b>Coke over gas</b>            | 16726 kJ/m <sup>3</sup> | 12.10 | 1 |
| <b>Other coal gas</b>           | 5227 kJ/m <sup>3</sup>  | 12.10 | 1 |
| <b>LPG</b>                      | 50179 kJ/m <sup>3</sup> | 17.20 | 1 |
| <b>Refinery gas</b>             | 46055 kJ/m <sup>3</sup> | 18.20 | 1 |

*Data sources: China Energy Statistical Yearbook 2006 Edition, P287;*

*Table 1.3 and Table 1.4, Volume 2 Energy, " 2006 IPCC Guidelines for National Greenhouse Gas Inventories", P1.21-1.24.*

Table A5~A7 show the calculation of the simple OM emission factor of CCPG in 2003, 2004 and 2005.



## CDM – Executive Board

Table A5. Calculation of the simple OM emission factor of CCPG in 2003

| Fuel type   | Unit                           | Jiangxi  | Henan    | Hubei    | Hunan    | Chongqing | Sichuan  | Total                | Emission factor | Oxidation rate | NCV                     | CO <sub>2</sub> emissions (tCO <sub>2</sub> e) |
|---|--------------------------------|----------|----------|----------|----------|-----------|----------|----------------------|-----------------|----------------|-------------------------|--|
|   |                                |          |          |          |          |           |          |                      | (tc/TJ)         | (%)            | (MJ/t,km <sup>3</sup> ) | $K=G*H*I*J*44/12/1000$<br>0 (mass unit)        |
|   |                                | <b>A</b> | <b>B</b> | <b>C</b> | <b>D</b> | <b>E</b>  | <b>F</b> | <b>G=A+B+C+D+E+F</b> | <b>H</b>        | <b>I</b>       | <b>J</b>                | $K=G*H*I*J*44/12/1000$<br>(volume unit)        |
| Raw coal  | 10 <sup>4</sup> t              | 1427.41  | 5504.94  | 2072.44  | 1646.47  | 769.47    | 2430.93  | <b>13851.66</b>      | 25.8            | 100            | 20908                   | 273971539.89                                   |
| Clean washed coal   | 10 <sup>4</sup> t              |          |          |          |          |           |          | <b>0</b>             | 25.8            | 100            | 26344                   | 0.00   |
| Other washed coal   | 10 <sup>4</sup> t              | 2.03     | 39.63    |          |          | 106.12    |          | <b>147.78</b>        | 25.8            | 100            | 8363                    | 1169146.40                                     |
| Coke  | 10 <sup>4</sup> t              |          |          |          | 1.22     |           |          | <b>1.22</b>          | 25.8            | 100            | 28435                   | 32817.40                                       |
| Coke oven gas   | 10 <sup>8</sup> m <sup>3</sup> |          |          | 0.93     |          |           |          | <b>0.93</b>          | 12.1            | 100            | 16726                   | 69013.15                                       |
| Other gas   | 10 <sup>8</sup> m <sup>3</sup> |          |          |          |          |           |          | <b>0</b>             | 12.1            | 100            | 5227                    | 0.00   |
| Crude oil   | 10 <sup>4</sup> t              |          | 0.5      | 0.24     |          |           | 1.2      | <b>1.94</b>          | 20              | 100            | 41816                   | 59490.23                                       |
| Gasoline  | 10 <sup>4</sup> t              |          |          |          |          |           |          | <b>0</b>             | 18.9            | 100            | 43070                   | 0.00   |
| Diesel  | 10 <sup>4</sup> t              | 0.52     | 2.54     | 0.69     | 1.21     | 0.77      |          | <b>5.73</b>          | 20.2            | 100            | 42652                   | 181015.94                                      |
| Fuel oil  | 10 <sup>4</sup> t              | 0.42     | 0.25     | 2.17     | 0.54     | 0.28      | 1.2      | <b>4.86</b>          | 21.1            | 100            | 41816                   | 157229.00                                      |
| LPG   | 10 <sup>4</sup> t              |          |          |          |          |           |          | <b>0</b>             | 17.2            | 100            | 50179                   | 0.00   |
| Refined gas   | 10 <sup>4</sup> t              | 1.76     | 6.53     |          | 0.66     |           |          | <b>8.95</b>          | 18.2            | 100            | 46055                   | 275069.63                                      |
| Natural gas   | 10 <sup>8</sup> m <sup>3</sup> |          |          |          |          | 0.04      | 2.2      | <b>2.24</b>          | 15.3            | 100            | 38931                   | 489222.52                                      |
| Other petroleum products  | 10 <sup>4</sup> t              |          |          |          |          |           |          | <b>0</b>             | 20              | 100            | 38369                   | 0.00   |
| Other coking products   | 10 <sup>4</sup> t              |          |          |          |          |           |          | <b>0</b>             | 25.8            | 100            | 28435                   | 0.00   |
| Other energy  | 10 <sup>4</sup> t Ce           |          | 11.04    |          |          | 16.2      |          | <b>27.24</b>         | 0               | 100            | 0                       | 0.00   |
| <b>Total emissions of CCPG (tCO<sub>2</sub>e)</b>               |                                |          |          |          |          |           |          |                      |                 |                |                         | <b>276,404,544</b>                             |
| <b>Thermal power supplied to CCPG (MWh)</b>                     |                                |          |          |          |          |           |          |                      |                 |                |                         | <b>225,987,719</b>                             |
| <b>Simple OM emission factor of CCPG (tCO<sub>2</sub>e/MWh)</b> |                                |          |          |          |          |           |          |                      |                 |                |                         | <b>1.223095</b>                                |

Data sources: China Energy Statistical Yearbook 2004 Edition.



## CDM – Executive Board

Table A6. Calculation of the simple OM emission factor of CCPG in 2004

| Fuel type   | Unit                           | Jiangxi  | Henan    | Hubei    | Hunan    | Chongqing | Sichuan  | Total                | Emission factor | Oxidation rate | NCV                     | CO <sub>2</sub> emissions (tCO <sub>2</sub> e) |
|---|--------------------------------|----------|----------|----------|----------|-----------|----------|----------------------|-----------------|----------------|-------------------------|--|
|   |                                |          |          |          |          |           |          |                      | (tc/TJ)         | (%)            | (MJ/t,km <sup>3</sup> ) | $K=G*H*I*J*44/12/1000$<br>0 (mass unit)        |
|   |                                | <b>A</b> | <b>B</b> | <b>C</b> | <b>D</b> | <b>E</b>  | <b>F</b> | <b>G=A+B+C+D+E+F</b> | <b>H</b>        | <b>I</b>       | <b>J</b>                | $K=G*H*I*J*44/12/1000$<br>(volume unit)        |
| Raw coal  | 10 <sup>4</sup> t              | 1863.8   | 6948.5   | 2510.5   | 2197.9   | 875.5     | 2747.9   | <b>17144.1</b>       | 25.8            | 100            | 20908                   | 339092605.29                                   |
| Clean washed coal   | 10 <sup>4</sup> t              |          | 2.34     |          |          |           |          | <b>2.34</b>          | 25.8            | 100            | 26344                   | 58316.13                                       |
| Other washed coal   | 10 <sup>4</sup> t              | 48.93    | 104.22   |          |          | 89.72     |          | <b>242.87</b>        | 25.8            | 100            | 8363                    | 1921441.23                                     |
| Coke  | 10 <sup>4</sup> t              |          | 109.61   |          |          |           |          | <b>109.61</b>        | 25.8            | 100            | 28435                   | 2948455.29                                     |
| Coke oven gas   | 10 <sup>8</sup> m <sup>3</sup> |          |          | 1.68     |          | 0.34      |          | <b>2.02</b>          | 12.1            | 100            | 16726                   | 149899.53                                      |
| Other gas   | 10 <sup>8</sup> m <sup>3</sup> |          |          |          |          | 2.61      |          | <b>2.61</b>          | 12.1            | 100            | 5227                    | 60527.09                                       |
| Crude oil   | 10 <sup>4</sup> t              |          | 0.86     | 0.22     |          |           |          | <b>1.08</b>          | 20              | 100            | 41816                   | 33118.27                                       |
| Gasoline  | 10 <sup>4</sup> t              |          | 0.06     |          |          | 0.01      |          | <b>0.07</b>          | 18.9            | 100            | 43070                   | 2089.33  |
| Diesel  | 10 <sup>4</sup> t              | 0.02     | 3.86     | 1.7      | 1.72     | 1.14      |          | <b>8.44</b>          | 20.2            | 100            | 42652                   | 266627.32                                      |
| Fuel oil  | 10 <sup>4</sup> t              | 1.09     | 0.19     | 9.55     | 1.38     | 0.48      | 1.68     | <b>14.37</b>         | 21.1            | 100            | 41816                   | 464893.14                                      |
| LPG   | 10 <sup>4</sup> t              |          |          |          |          |           |          | <b>0</b>             | 17.2            | 100            | 50179                   | 0.00   |
| Refined gas   | 10 <sup>4</sup> t              | 3.52     | 2.27     |          |          |           |          | <b>5.79</b>          | 18.2            | 100            | 46055                   | 177950.07                                      |
| Natural gas   | 10 <sup>8</sup> m <sup>3</sup> |          |          |          |          |           | 2.27     | <b>2.27</b>          | 15.3            | 100            | 38931                   | 495774.61                                      |
| Other petroleum products  | 10 <sup>4</sup> t              |          |          |          |          |           |          | <b>0</b>             | 20              | 100            | 38369                   | 0.00   |
| Other coking products   | 10 <sup>4</sup> t              |          |          |          |          |           |          | <b>0</b>             | 25.8            | 100            | 28435                   | 0.00   |
| Other energy  | 10 <sup>4</sup> t Ce           |          | 16.92    |          | 15.2     | 20.95     |          | <b>53.07</b>         | 0               | 100            | 0                       | 0.00   |
| <b>Total emissions of CCPG (tCO<sub>2</sub>e)</b>               |                                |          |          |          |          |           |          |                      |                 |                |                         | <b>345,671,697</b>                             |
| <b>Thermal power supplied to CCPG (MWh)</b>                     |                                |          |          |          |          |           |          |                      |                 |                |                         | <b>249,074,186</b>                             |
| <b>Simple OM emission factor of CCPG (tCO<sub>2</sub>e/MWh)</b> |                                |          |          |          |          |           |          |                      |                 |                |                         | <b>1.387826</b>                                |

Data sources: China Energy Statistical Yearbook 2005 Edition.



## CDM – Executive Board

Table A7. Calculation of the simple OM emission factor of CCPG in 2005

| Fuel type   | Unit                           | Jiangxi | Henan   | Hubei   | Hunan   | Chongqing | Sichuan | Total               | Emission factor | Oxidation rate | NCV                     | CO <sub>2</sub> emissions (tCO <sub>2</sub> e) |
|---|--------------------------------|---------|---------|---------|---------|-----------|---------|---------------------|-----------------|----------------|-------------------------|--|
|   |                                |         |         |         |         |           |         |                     | (tc/TJ)         | (%)            | (MJ/t,km <sup>3</sup> ) | $K=G*H*I*J*44/12/1000$<br>0 (mass unit)        |
|   |                                | A       | B       | C       | D       | E         | F       | $G=A+B+C+D+E$<br>+F | H               | I              | J                       | $K=G*H*I*J*44/12/1000$<br>(volume unit)        |
| Raw coal  | 10 <sup>4</sup> t              | 1869.29 | 7638.87 | 2732.15 | 1712.27 | 875.4     | 2999.77 | <b>17827.75</b>     | 25.8            | 100            | 20908                   | 352614496.76                                   |
| Clean washed coal                                 | 10 <sup>4</sup> t              | 0.02    |         |         |         |           |         | <b>0.02</b>         | 25.8            | 100            | 26344                   | 498.43   |
| Other washed coal                                 | 10 <sup>4</sup> t              |         | 138.12  |         |         | 89.99     |         | <b>228.11</b>       | 25.8            | 100            | 8363                    | 1804669.00                                     |
| Coke  | 10 <sup>4</sup> t              |         | 25.95   |         | 105     |           |         | <b>130.95</b>       | 25.8            | 100            | 28435                   | 3522490.83                                     |
| Coke oven gas                                     | 10 <sup>8</sup> m <sup>3</sup> |         |         | 1.15    |         | 0.36      |         | <b>1.51</b>         | 12.1            | 100            | 16726                   | 112053.61                                      |
| Other gas   | 10 <sup>8</sup> m <sup>3</sup> |         | 10.2    |         |         | 3.12      |         | <b>13.32</b>        | 12.1            | 100            | 5227                    | 308896.88                                      |
| Crude oil   | 10 <sup>4</sup> t              |         | 0.82    | 0.36    |         |           |         | <b>1.18</b>         | 20              | 100            | 41816                   | 36184.78                                       |
| Gasoline  | 10 <sup>4</sup> t              |         | 0.02    |         |         | 0.02      |         | <b>0.04</b>         | 18.9            | 100            | 43070                   | 1193.90  |
| Diesel  | 10 <sup>4</sup> t              | 1.3     | 3.03    | 2.39    | 1.39    | 1.38      |         | <b>9.49</b>         | 20.2            | 100            | 42652                   | 299797.78                                      |
| Fuel oil  | 10 <sup>4</sup> t              | 0.64    | 0.29    | 3.15    | 1.68    | 0.89      | 2.22    | <b>8.87</b>         | 21.1            | 100            | 41816                   | 286959.09                                      |
| LPG   | 10 <sup>4</sup> t              |         |         |         |         |           |         | <b>0</b>            | 17.2            | 100            | 50179                   | 0.00   |
| Refined gas                                       | 10 <sup>4</sup> t              | 0.71    | 3.41    | 1.76    | 0.78    |           |         | <b>6.66</b>         | 18.2            | 100            | 46055                   | 204688.68                                      |
| Natural gas                                       | 10 <sup>8</sup> m <sup>3</sup> |         |         |         |         |           | 3       | <b>3</b>            | 15.3            | 100            | 38931                   | 655208.73                                      |
| Other petroleum products                          | 10 <sup>4</sup> t              |         |         |         |         |           |         | <b>0</b>            | 20              | 100            | 38369                   | 0.00   |
| Other coking products                             | 10 <sup>4</sup> t              |         |         |         | 1.5     |           |         | <b>1.5</b>          | 25.8            | 100            | 28435                   | 40349.27                                       |
| Other energy                                      | 10 <sup>4</sup> t Ce           |         | 2.88    |         | 1.74    | 32.8      |         | <b>37.42</b>        | 0               | 100            | 0                       | 0.00   |
| <b>Total emissions of CCPG (tCO<sub>2</sub>e)</b> |                                |         |         |         |         |           |         |                     |                 |                |                         | <b>359,887,488</b>                             |
| <b>Thermal power supplied to CCPG (MWh)</b>       |                                |         |         |         |         |           |         |                     |                 |                |                         | <b>286,203,305</b>                             |



## CDM – Executive Board

|   |                 |
|---|-----------------|
| <b>Simple OM emission factor of CCPG (tCO<sub>2</sub>e/MWh)</b> | <b>1.257454</b> |
|---|-----------------|

Data sources: China Energy Statistical Yearbook 2006 Edition.

The Simple OM emission factor is the weighted average value of the Simple OM emission factors in the year 2003, 2004 and 2005, i.e.  $EF_{OM,y} = (276404544 + 345671697 + 359887488) / (225987719 + 249074186 + 286203305) = 1.2899$  tCO<sub>2</sub>e/MWh.

Build Margin emission factor is calculated according to the steps and formulae described in Section B.6.1.

Table A8 is the calculation of the emission factor reflecting the efficiency level of the best electricity generation technology commercially available in China with reference to the *Notification on Determining Baseline Emission Factors of China Power Grid* issued by Chinese DNA.

Table A8. The efficiency level of the best electricity generation technology commercially available in China

|                               | <b>Parameter</b> | <b>Efficiency of supplying electricity</b> | <b>Fuel emission factor (tc/TJ)</b> | <b>Oxidation rate</b> | <b>Emission factor (tCO<sub>2</sub>e/MWh)</b> |
|-------------------------------|------------------|--|-------------------------------------|-----------------------|---|
|                               |                  | A  | B                                   | C                     | D=3.6/A/1000*B*C*44/12                        |
| <b>Coal-fired power plant</b> | $EF_{Coal,Adv}$  | 35.82%                                     | 25.8                                | 1                     | 0.9508  |
| <b>Gas-fired power plant</b>  | $EF_{Gas,Adv}$   | 47.67%                                     | 15.3                                | 1                     | 0.4237  |
| <b>Oil-fired power plant</b>  | $EF_{Oil,Adv}$   | 47.67%                                     | 21.1                                | 1                     | 0.5843  |

Table A9 shows the CO<sub>2</sub> emissions of CCPG in 2005.



## CDM – Executive Board

Table A9. CO<sub>2</sub> emissions of CCPG in 2005

| Fuel type                | Unit                           | Jiangxi | Henan   | Hubei   | Hunan   | Chongqing | Sichuan | Total     | Emission factor | Oxidation rate | NCV   | CO <sub>2</sub> emissions (tCO <sub>2</sub> e) |
|--------------------------|--------------------------------|---------|---------|---------|---------|-----------|---------|-----------|-----------------|----------------|-------|--|
|                          |                                | A       | B       | C       | D       | E         | F       | G=A+...+F | H               | I              | J     | K=G*H*I*J*44/12/100                            |
| Coal                     | 10 <sup>4</sup> t              | 1869.29 | 7638.87 | 2732.15 | 1712.27 | 875.4     | 2999.77 | 17827.75  | 25.8            | 1              | 20908 | 352,614,497                                    |
| Cleaned coal             | 10 <sup>4</sup> t              | 0.02    | 0       | 0       | 0       | 0         | 0       | 0.02      | 25.8            | 1              | 26344 | 498  |
| Other washed coal        | 10 <sup>4</sup> t              | 0       | 138.12  | 0       | 0       | 89.99     | 0       | 228.11    | 25.8            | 1              | 8363  | 1,804,669                                      |
| Coke                     | 10 <sup>4</sup> t              | 0       | 25.95   | 0       | 106.5   | 0         | 0       | 132.45    | 25.8            | 1              | 28435 | 3,562,840                                      |
| <b>Sub-total</b>         |                                |         |         |         |         |           |         |           |                 |                |       | <b>357,982,504</b>                             |
| Crude oil                | 10 <sup>4</sup> t              | 0       | 0.82    | 0.36    | 0       | 0         | 0       | 1.18      | 20              | 1              | 41816 | 36,185   |
| Gasoline                 | 10 <sup>4</sup> t              | 0       | 0.02    | 0       | 0       | 0.02      | 0       | 0.04      | 18.9            | 1              | 43070 | 1,194  |
| Kerosene                 | 10 <sup>4</sup> t              | 0       | 0       | 0       | 0       | 0         | 0       | 0         | 19.6            | 1              | 43070 | 0  |
| Diesel                   | 10 <sup>4</sup> t              | 1.3     | 3.03    | 2.39    | 1.39    | 1.38      | 0       | 9.49      | 20.2            | 1              | 42652 | 299,798  |
| Fuel oil                 | 10 <sup>4</sup> t              | 0.64    | 0.29    | 3.15    | 1.68    | 0.89      | 2.22    | 8.87      | 21.1            | 1              | 41816 | 286,959  |
| Other petroleum products | 10 <sup>4</sup> t              | 0       | 0       | 0       | 0       | 0         | 0       | 0         | 20              | 1              | 38369 | 0  |
| <b>Sub-total</b>         |                                |         |         |         |         |           |         |           |                 |                |       | <b>624,136</b>                                 |
| Natural gas              | 10 <sup>8</sup> m <sup>3</sup> | 0       | 0       | 0       | 0       | 0         | 30      | 30        | 15.3            | 1              | 38931 | 655,209  |
| Coke oven gas            | 10 <sup>8</sup> m <sup>3</sup> | 0       | 0       | 11.5    | 0       | 3.6       | 0       | 15.1      | 12.1            | 1              | 16726 | 112,054  |
| other coke gas           | 10 <sup>8</sup> m <sup>3</sup> | 0       | 102     | 0       | 0       | 31.2      | 0       | 133.2     | 12.1            | 1              | 5227  | 308,897  |
| LPG                      | 10 <sup>4</sup> t              | 0       | 0       | 0       | 0       | 0         | 0       | 0         | 17.2            | 1              | 50179 | 0  |
| Refinery gas             | 10 <sup>4</sup> t              | 0.71    | 3.41    | 1.76    | 0.78    |           |         | 6.66      | 18.2            | 1              | 46055 | 204,689  |
| <b>Sub-total</b>         |                                |         |         |         |         |           |         |           |                 |                |       | <b>1,280,848</b>                               |
| <b>Total</b>             |                                |         |         |         |         |           |         |           |                 |                |       | <b>359,887,488</b>                             |

Data sources: China Energy Statistical Yearbook 2006 Edition.



## CDM – Executive Board

Calculate with data provided in Table A9 and formula (4)~(6) in section B.6.1, the value for  $I_{Coal}$  is 99.47%, the value for  $I_{Oil}$  is 0.17% and the value for  $I_{Gas}$  is 0.36%.

Based on Table A8 and formula (7) in section B.6.1, the emission factor for thermal power is:

$$EF_{Thermal} = I_{Coal} \times EF_{Coal,Adv} + I_{Oil} \times EF_{Oil,Adv} + I_{Gas} \times EF_{Gas,Adv} = 0.9482 \text{ tCO}_2\text{e/MWh.}$$

Table A10~A12 show the installed capacity of CCPG in 2005, 2003 and 2002 and Table A13 shows the calculation of BM emission factor of CCPG.

Table A10. Installed capacity of CCPG in 2005

|                                  | <b>Jiangxi</b> | <b>Henan</b> | <b>Hubei</b> | <b>Huanan</b> | <b>Chongqing</b> | <b>Sichuan</b> | <b>Total</b> |
|----------------------------------|----------------|--------------|--------------|---------------|------------------|----------------|--------------|
| <b>Thermal power (MW)</b>        | 5906           | 26267.8      | 9526.3       | 7211.6        | 3759.5           | 7496           | 60167.2      |
| <b>Hydro power (MW)</b>          | 3019           | 2539.9       | 8088.9       | 7905.1        | 1892.7           | 14959.6        | 38405.2      |
| <b>Nuclear power (MW)</b>        | 0              | 0            | 0            | 0             | 0                | 0              | 0            |
| <b>Wind power and Other (MW)</b> | 0              | 0            | 0            | 0             | 24               | 0              | 24           |
| <b>Total (MW)</b>                | 8925           | 28807.7      | 17615.2      | 15116.7       | 5676.2           | 22455.6        | 98596.4      |

Data source: China Electric Power Yearbook 2006 Edition.

Table A11. Installed capacity of CCPG in 2003

|                                  | <b>Jiangxi</b> | <b>Henan</b> | <b>Hubei</b> | <b>Huanan</b> | <b>Chongqing</b> | <b>Sichuan</b> | <b>Total</b> |
|----------------------------------|----------------|--------------|--------------|---------------|------------------|----------------|--------------|
| <b>Thermal power (MW)</b>        | 5407.8         | 17635.5      | 8173.3       | 6446.7        | 3126.2           | 6104           | 46893.5      |
| <b>Hydro power (MW)</b>          | 2307.4         | 2438         | 7337.2       | 6603.1        | 1329.8           | 12341.5        | 32357        |
| <b>Nuclear power (MW)</b>        | 0              | 0            | 0            | 0             | 0                | 0              | 0            |
| <b>Wind power and Other (MW)</b> | 0              | 0            | 0            | 0             | 0                | 0              | 0            |
| <b>Total (MW)</b>                | 7715.2         | 20073.5      | 15510.5      | 13049.8       | 4456             | 18445.5        | 79250.5      |

Data source: China Electric Power Yearbook 2004 Edition.





## CDM – Executive Board

Table A12. Installed capacity of CCPG in 2002

|                           | Jiangxi       | Henan          | Hubei          | Huanan         | Chongqiong  | Sichuan        | Total          |
|---------------------------|---------------|----------------|----------------|----------------|-------------|----------------|----------------|
| Thermal power (MW)        | 5128.8        | 15904.5        | 8147.8         | 4975.6         | 3004.5      | 6142           | 43303.2        |
| Hydro power (MW)          | 2197.4        | 2438           | 7213.9         | 6135.3         | 1195.5      | 11854.6        | 31034.7        |
| Nuclear power (MW)        | 0             | 0              | 0              | 0              | 0           | 0              | 0              |
| Wind power and Other (MW) | 0             | 0              | 0              | 0              | 0           | 0              | 0              |
| <b>Total (MW)</b>         | <b>7326.2</b> | <b>18342.5</b> | <b>15361.7</b> | <b>11110.9</b> | <b>4200</b> | <b>17996.6</b> | <b>74337.9</b> |

Data source: China Electric Power Yearbook 2003 Edition.

Table A13. Calculation of BM emission factor of CCPG

|   | Installed capacity in 2002 | Installed capacity in 2003 | Installed capacity in 2005 | Capacity additions during 2002-2005 | Share in total capacity additions |
|---|----------------------------|----------------------------|----------------------------|-------------------------------------|-----------------------------------|
|   | A                          | B                          | C                          | D=C-A                               |                                   |
| Thermal power(MW)                                   | 43303.2                    | 46893.5                    | 60167.2                    | 16864                               | <b>69.52%</b>                     |
| Hydro power(MW)                                     | 31034.7                    | 32357                      | 38405.2                    | 7370.5                              | 30.38%                            |
| Nuclear power(MW)                                   | 0                          | 0                          | 0                          | 0                                   | 0.00%                             |
| Wind power (MW)                                     | 0                          | 0                          | 24                         | 24                                  | 0.10%                             |
| <b>Total(MW)</b>                                    | <b>74337.9</b>             | <b>79250.5</b>             | <b>98596.4</b>             | <b>24258.5</b>                      | <b>100%</b>                       |
| <b>Proportion to the installed capacity in 2005</b> | 75.40%                     | 80.38%                     | 100.00%                    |                                     |                                   |

As shown in Table A13, the proportion of capacity additions during 2002~2005 to the total installed capacity in 2005 is 24.6% (1-75.4%), which is the most close to 20%, therefore year 2002 is determined as the reference year for BM emission factor calculation. Among the capacity additions, the thermal power share is 69.52% (16864/24258.5).

Based on Table A13 and formula (8) in section B.6.1, calculate the BM emission factor of ECPG as:

$$EF_{BM,y} = \frac{CAP_{Thermal}}{CAP_{Total}} \times EF_{Thermal} = 0.6952 \times 0.9482 = 0.6592 \text{ tCO}_2\text{e/MWh.}$$



**Annex 4**

**MONITORING INFORMATION**

Please refer to section B.7. No need to complement more information here.